



NR8-16F82

16CH 2HDD 16CH PoE 4K NVR



Key Features

- Up to 16-ch IP camera access
- Up to 160 Mbps incoming/outgoing bandwidth
- Up to 1-ch @ 12MP/4-ch @ 4MP/8-ch @ 1080P/16-ch D1 decoding capacity
- Supports mask detection, facial recognition, and multi-object recognition
- Supports some specialty cameras, including people-counting cameras, ANPR cameras, fisheye cameras, panoramic cameras and thermal cameras
- Supports VCA alarm linkage
- Up to 4-ch perimeter protection
- Plug & play with a 16 PoE interface
- Supports 1 HDMI and 1 VGA interface




Video Input	
IP Camera Input	16 Channel
Incoming Bandwidth	160 Mbps (112 Mbps with AI enabled)
Outgoing Bandwidth	160 Mbps (112 Mbps with AI enabled)
Video Output	
HDMI Output	3840 × 2160, 1920 × 1080, 1280 × 1024, 1024 × 768
VGA Output	1920 × 1080, 1280 × 1024, 1024 × 768
Different Source Output	Support
Decoding Capacity	1ch 12MP, 4ch 4MP, 8ch 1080P, 16ch D1
Dual Stream	Support
Multi-screen Display	1/4/9/16
AI Recognition	
Face Comparison	Real-time captured and display faces comparison results (registrant (name and ID), stranger, channel, similarity)
Multi-objective	Real-time captured and display vehicle, human body, non-motor vehicle, license plates image, and faces comparison results (registrant, stranger, channel, similarity)
Smart Search	Time, Properties, Pictures, License plate
Trigger Events	Buzzer, Alarm push, Alarm prompt, Email, Alarm Out, Compare the result simultaneously, etc.
Recording	
Resolution	12MP, 8MP, 6MP, 5MP, 4MP, 3MP, 1080P, 720P, D1 etc.
Recording Mode	Manual, Schedule (Regular, Continuous), Event
Trigger Events	Motion Detection, Video Loss, Alarm in, IVS
Playback and Backup	
Sync Playback	16/9/4/1
Search Mode	Time/Date, Alarm, Picture Grid, Event
Backup Mode	USB Device, Network
Alarm	
General Alarm	Motion Detection, Video Loss, Alarm in, Alarm out
Intelligent Analysis (By Camera)	Smoking Detection, Smoke and Fire Detection, Fire Spot Detection, Intrusion, Single Line Crossing, Double Line Crossing, Loitering, Wrong-way, Illegal Parking, People Counting, Smart motion detection, Enter Area, Leave Area, etc.
Abnormal Alarm	Disk Alarm, IP Address Conflict, Network Disconnect
Intrusion Detection (By NVR)	4-ch, support the accurate detection of human and vehicle

Network	
Network Function	HTTP, HTTPS, TCP/IP, IPv4/IPv6, UPnP, UDP, RTSP, SMTP, NTP, DNS, DHCP, P2P, IP Filter, DDNS, 802.1X, SNMP, 3G/4G, PPPoE
Remote Users	8 users
P2P	Support
Interoperability	ONVIF, SDK, CGI
Storage	
ANR	Support
Disk Group	Support
Interface	
HDD Interface	2 SATA interfaces, up to 12TB capacity for each disk
Network Interface	1 × RJ-45, 10/100/1000 Mbps self-adaptive Ethernet port
PoE Interface	16 ports, 10/100Mbps, 802.3af/at, max 128W
HDMI	1
VGA	1
Audio In/Out	1/1
Alarm In/Out	8/2
USB Interface	Front panel: 2 × USB 2.0, Rear panel: 1 × USB 2.0
Reset Button	On-board reset button
General	
Power Supply	100 to 240VAC
Power Consumption	< 15 W (without HDD)
Operating Conditions	14 °F to 122 °F (-10 °C to 50 °C)
Storage Conditions	Less than 90% RH
Certifications	CE/FCC
Dimensions	16.65 × 12.33 × 1.83 inch (372 × 311.2 × 46.4 mm)
Net Weight	6.05 lb (2.75 kg) without HDD



Dimensions (mm)

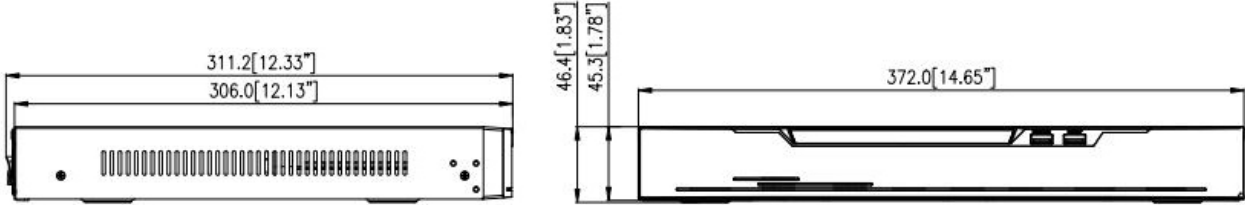

Rear Panel

